


# RUBY READY MIX CONCRETE

## FLYASH BRICK & PAVER BLOCK




### DESIGNER TILES AND PAVERS



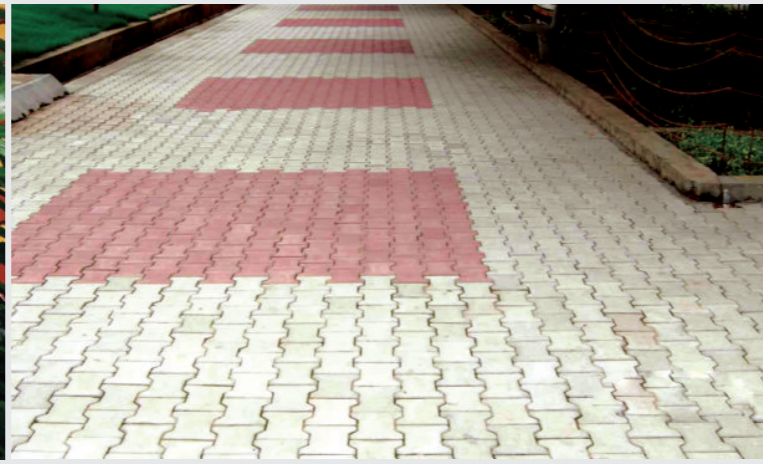

Zig Zac - 18


S Block - 18

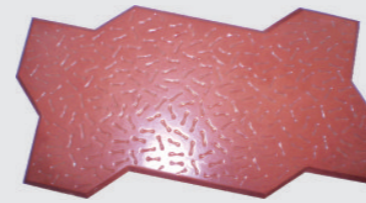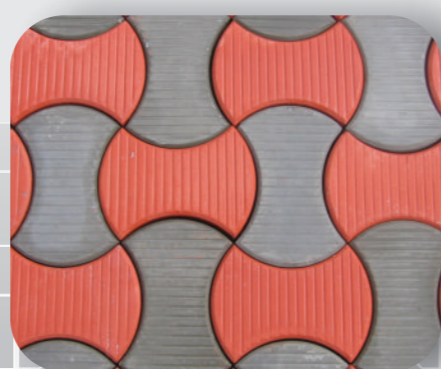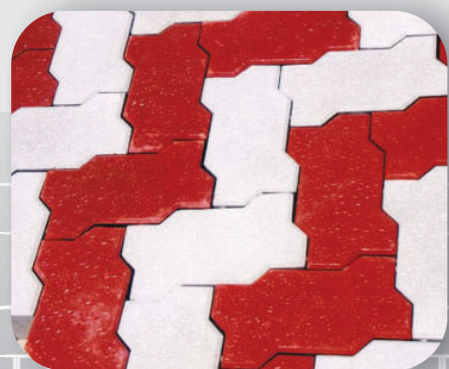


**Thickness**  
60 mm, 80mm  
**Size:** 247mm x 123mm  
**Area:** 0.36Sqft.



**Thickness**  
60 mm  
**Size:** 269mm x 190mm  
**Area:** 0.36Sqft.

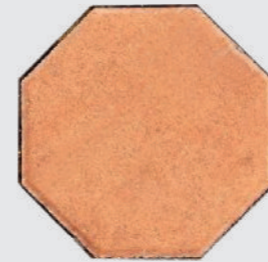

**Thickness**  
**Size:** 12" x 12"  
**Area:** 1Sqft.

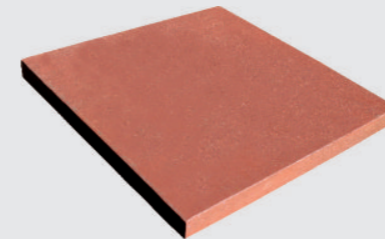

**Thickness**  
60 mm, 80mm  
**Size:** 247mm x 123mm  
**Area:** 0.36Sqft.



**Thickness**  
60 mm  
**Size:** 254mm x 127mm  
**Area:** 0.45Sqft.



**Thickness**  
**Size:**  
**Area:** Sqft.

Combo - 16



Zig Zac - 18



Tri-Hex - 20



Grass Paver



# PAVER BLOCK LAYING INSTRUCTIONS

## ITEMS REQUIRED FOR LAYING

- Block Cutter and Alignment Bar
- Rubber Hammer for tapping blocks without damaging the surface
- Plate vibrator for final compaction with two to three paves of the plate

## HOW TO LAY

- Organize all materials like blocks, sand, vibrators and cutter
- Plan your schedule to avoid delivery of materials before they are needed as they congest the site
- Keep the sand with moisture content, do not use sand which is 100 % dry
- Do not spread sand for larger areas, as it will dry out and reduce the performance
- Preferably, use sand of 50mm screeded properly
- Paver should be laid with hand tight to pattern on screeded layer of 50mm sand bed
- Spectra premium Pavers are designed with 'NIBS' provide definite gap between blocks. Dry Sand is spread and swept over the area and further vibrated to fill joints.
- Complete laying operations like cutting, vibrating and sanding (joint filling) are to be done on the same day. It is important to note that laying operation should not be done on piece meal basis it should be completed in all respects on the same day
- Spectra Pavers are produced through moulding process, hence even/uneven gaps may arise after laying. Hence joints should be filled with clean dry sand, so that it flows better and fills joints effectively.
- Edge curbing : There should be adequate restraint around the perimeter of all paved area to support traffic loads and to prevent the escape of laying course material from beneath the paved surface
- It is recommended to provide a slope of 3" on the wider side and 2" on the linear side floor every 10" of the laying area.
- The individual paver dimensions in sq ft. shown, are rounded off to the nearest decimal point
- Colors shown are indicative only color and thickness variations are inherent properties of this industry.
- It is advisable to follow the laying instructions before fixing, as no responsibility is accepted by the company once laid.

## COLORS AVAILABLE



Red

Saffron

Dholpur

Dover Grey

Light Grey

Black

## RUBY READY MIX CONCRETE FLYASH BRICK & PAVER BLOCK

AN ISO 9001 2008 CERTIFIED COMPANY

### Admin Office:

No. 36, Ruby Mansion, Bharatha Matha Street,  
East Tambaram, Chennai - 600 059.  
Ph: 044 - 2239 7292, 2229 2695  
E-mail: rubyreadymix@gmail.com

### Factory Address:

**Unit - I** No. 116, Agaramthen Main Road Selaiyur,  
Chennai - 600 073.  
**Unit - II** No. 211/A, 11/A, Pulikoradu Village  
West Tambaram, Chennai - 600 045.

**MOBILE: 98410 73366, 72992 63366, 72992 73366, 95516 93366, 72993 03366**